


GripTight® Reverse Pressure 3/4" – 1" Test Plug Specifications

GTRP Specifications		
Downstream / Test Maximum Pressure	2250 PSIG	(155 BARG)
Upstream Maximum Pressure	1500 PSIG	(103 BARG)
Operational Temperature Range	-10°F thru 180°F	(-23°C thru 82°C)
Pipe Size Range	3/4" thru 1" – Various Schedules	
Standard Seal Material	Urethane	
Standard Plug Material	Aluminum and Zinc Plated Steel	
Required Pipe ID Condition	No Sediment, Scale, Pitting, or Corrosion.	
Compatible Test Media	Water, Air, Glycol (Low Temperature Applications)	
Compliance with Industry Standard Testing	ASME B16.5, ASME B31.1, ASME B31.3, and ASME PCC-2	

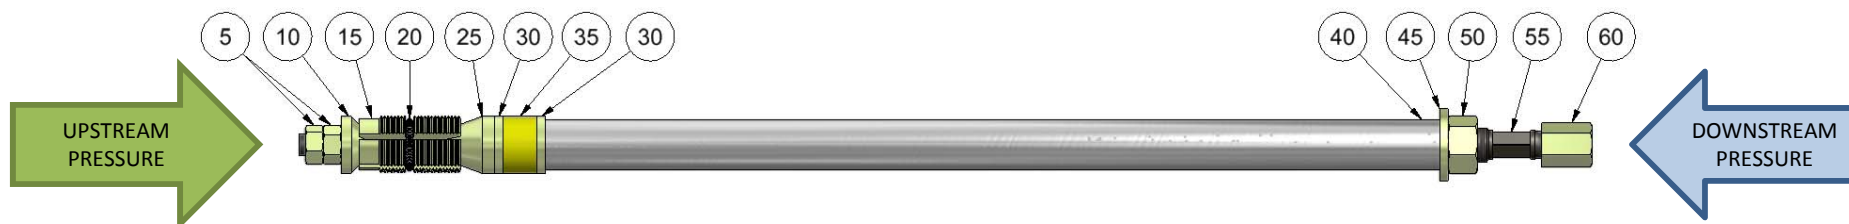

JAM NUT	BACK CONE	GRIPPER	RET_G SPRING	FRONT CONE	SEAL WASHER	SEAL	COMP TUBE	COMP WASHER	COMP NUT	SHAFT	PIPE CAP
5	10	15	20	25	30	35	40	45	50	55	60

GTRP Test Plug


3/4" – 1" Technical Specifications



SALES NUMBER	PIPE SIZE	PIPE SCH	OVERALL LENGTH OF GTRP PLUG		PIPE ID - NOMINAL	PLUG OD	CLEARANCE BETWEEN SEAL AND NOMINAL PIPE ID		PIPE CAP HEX SIZE	SHAFT HEX SIZE	COMPRESSION NUT HEX SIZE	NORMAL INSTALLATION TORQUE		MAXIMUM INSTALLATION TORQUE		APPROXIMATE PLUG WEIGHT	
			in	mm	in	in	in	mm	in	in	in	Ft-lbs	N-m	Ft-lbs	N-m	lbs	kg
GTRP-075P80	3/4	80	18 3/4	476	0.74	0.65	0.09	2.3	9/16	3/8	3/4	8	11	12	16	1.5	0.68
GTRP-075P40		40	18 3/4	476	0.82	0.72	0.10	2.5	9/16	3/8	3/4	8	11	12	16	1.5	0.68
GTRP-1P160	1	160	18 3/4	476	0.82	0.72	0.10	2.5	9/16	3/8	3/4	8	11	12	16	1.5	0.68
GTRP-1P80		80	18 3/4	476	0.96	0.84	0.12	3.0	9/16	3/8	3/4	12	16	16	22	1.5	0.68
GTRP-1P40		40	18 3/4	476	1.05	0.93	0.12	3.0	9/16	3/8	3/4	12	16	16	22	1.5	0.68


GTRP TEST PLUG				FLANGE CAP ASSEMBLY				
SALES NUMBER	PIPE SIZE	PIPE SCH		SALES NUMBER	FLANGE CLASS	PRESSURE RATING		NPT PORT SIZE (FILL AND VENT)
						PSIG	BARG	
GTRP-075P80	3/4	80		GTRP-075-150	150	450	31	1/8
GTRP-075P40		40		GTRP-075-300	300	1125	78	
			GTRP-075-600	600	2250	155		
GTRP-1P160	1	160	GTRP-1-150	150	450	31	1/8	
GTRP-1P80		80	GTRP-1-300	300	1125	78		
GTRP-1P40		40	GTRP-1-600	600	2250	155		

NOTE: 3/4" AND 1" GTRP TEST PLUGS **MUST** BE USED WITH A FLANGE CAP ASSEMBLY.

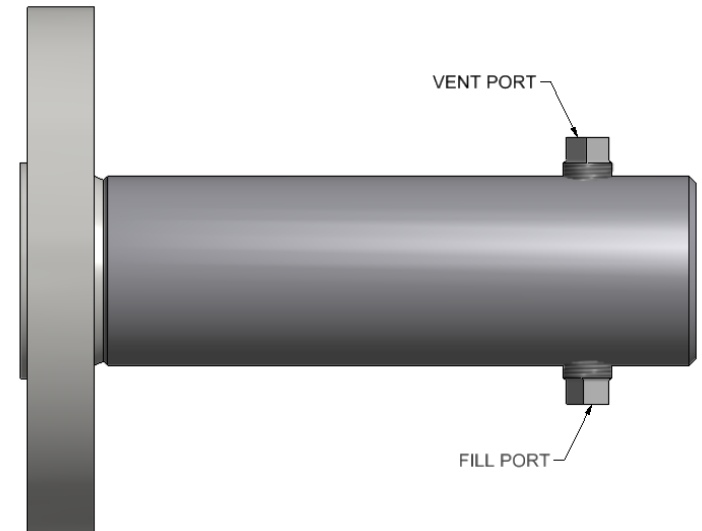

GripTight® Reverse Pressure 1-1/2" – 6" Test Plug Specifications

GTRP Specifications		
Downstream / Test Maximum Pressure	2250 PSIG	(155 BARG)
Upstream Maximum Pressure	1500 PSIG	(103 BARG)
Operational Temperature Range	-10°F thru 180°F	(-23°C thru 82°C)
Pipe Size Range	2" thru 6" – Various Schedules	
Standard Seal Material	Urethane	
Standard Plug Material	Zinc Plated Steel	
Required Pipe ID Condition	No Sediment, Scale, Pitting, or Corrosion.	
Compatible Test Media	Water, Air, Glycol (Low Temperature Applications)	
Compliance with Industry Standard Testing	ASME B16.5, ASME B31.1, ASME B31.3, and ASME PCC-2	

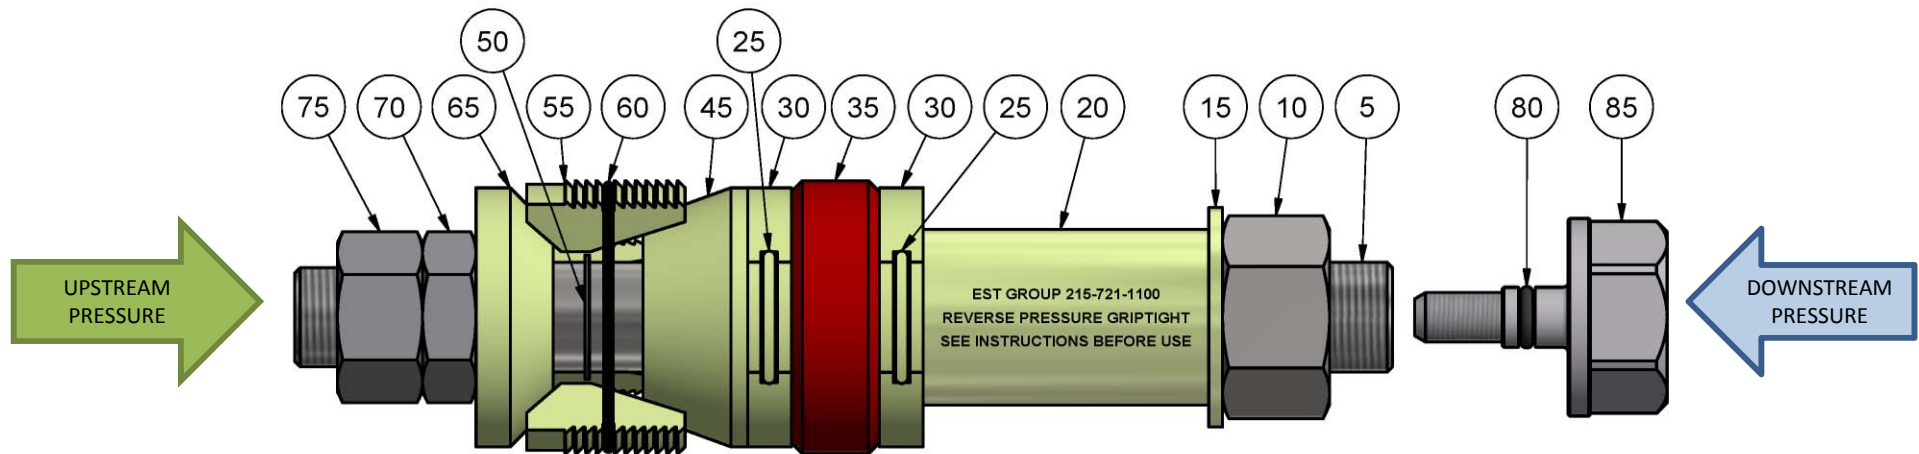

SHAFT	HEX NUT	HARD WASHER	COMP TUBE	O-RING	O-RING WASHER	SEAL	FRONT CONE	RET_G CLIP	GRIPPERS	RET_G SPRING	BACK CONE	JAM NUT	HEX NUT	CAP O-RING	PRESSURE CAP
5	10	15	20	25	30	35	45	50	55	60	65	70	75	80	85

GTRP Test Plug

1-1/2" – 6" Technical Specifications


SALES NUMBER	PIPE SIZE	PIPE SCH	OVERALL LENGTH OF GTRP PLUG		PIPE ID - NOMINAL	PLUG OD	CLEARANCE BETWEEN SEAL AND NOMINAL PIPE ID		NORMAL INSTALLATION TORQUE		MAXIMUM INSTALLATION TORQUE		APPROXIMATE PLUG WEIGHT	
			in	mm	in	in	in	mm	Ft-lbs	N-m	Ft-lbs	N-m	lbs	kg
GTRP-15P160	1 1/2	160	8	203	1.34	1.19	0.15	3.8	25	34	40	54	4	2
GTRP-15P80		80	8	203	1.50	1.35	0.15	3.8	25	34	40	54	4	2
GTRP-15P40		40	8	203	1.61	1.46	0.15	3.8	25	34	40	54	4	2
GTRP-15P10		10	8	203	1.68	1.53	0.15	3.8	25	34	40	54	4	2
GTRP-15P5		5	8	203	1.77	1.61	0.16	4.1	25	34	40	54	4	2
GTRP-2PXXS	2	XXS	8	203	1.50	1.35	0.15	3.8	25	34	40	54	4	2
GTRP-2P160		160	8	203	1.69	1.53	0.16	4.1	25	34	40	54	4	2
GTRP-2P80		80	9 1/8	232	1.94	1.76	0.18	4.6	35	47	50	68	5	2
GTRP-2P40		40	9 1/8	232	2.07	1.89	0.18	4.6	35	47	50	68	5	2
GTRP-2P10		10	9 1/8	232	2.16	1.98	0.18	4.6	35	47	50	68	7	3
GTRP-2P5		5	9 1/8	232	2.25	2.07	0.18	4.6	35	47	50	68	7	3
GTRP-25PXXS	2 1/2	XXS	8	203	1.77	1.61	0.16	4.1	25	34	40	54	4	2
GTRP-25P160		160	9 1/8	232	2.13	1.98	0.15	3.8	35	47	50	68	7	3
GTRP-25P80		80	9 1/8	232	2.32	2.13	0.19	4.8	35	47	50	68	9	4
GTRP-25P40		40	9 1/8	232	2.47	2.29	0.18	4.6	35	47	50	68	9	4
GTRP-25P10		10	9 1/8	232	2.64	2.46	0.18	4.6	35	47	50	68	9	4
GTRP-25P5		5	9 1/8	232	2.71	2.53	0.18	4.5	35	47	50	68	10	5
GTRP-3PXXS	3	XXS	9 1/8	232	2.30	2.13	0.17	4.3	35	47	50	68	9	4
GTRP-3P160		160	9 1/8	232	2.63	2.46	0.17	4.3	35	47	50	68	9	4
GTRP-3P80		80	12 1/2	318	2.90	2.69	0.21	5.3	200	270	300	400	12	5
GTRP-3P40		40	12 1/2	318	3.07	2.86	0.21	5.3	200	270	300	400	12	5
GTRP-3P10		10	12 1/2	318	3.26	3.04	0.22	5.6	200	270	300	400	14	6
GTRP-3P5		5	12 1/2	318	3.33	3.11	0.22	5.6	200	270	300	400	16	7
GTRP4PXXS	4	XXS	12 1/2	318	3.15	3.00	0.15	3.8	200	270	300	400	15	7
GTRP-4P160		160	12 1/2	318	3.44	3.29	0.15	3.8	200	270	300	400	16	7
GTRP-4P120		120	12 1/2	318	3.63	3.48	0.15	3.8	200	270	300	400	20	9
GTRP-4P80		80	12 1/2	318	3.83	3.63	0.20	5.1	200	270	300	400	22	10
GTRP-4P40		40	12 1/2	318	4.03	3.83	0.20	5.1	200	270	300	400	22	10
GTRP-4P10		10	12 1/2	318	4.26	4.06	0.20	5.1	200	270	300	400	25	11
GTRP-4P5		5	12 1/2	318	4.33	4.13	0.20	5.1	200	270	300	400	27	12
GTRP-6PXXS	6	XXS	19	483	4.90	4.70	0.20	5.1	400	540	900	1200	40	18
GTRP-6P160		160	19	483	5.19	4.99	0.20	5.1	400	540	900	1200	45	20
GTRP-6P120		120	19	483	5.50	5.30	0.20	5.1	400	540	900	1200	45	20
GTRP-6P80		80	19	483	5.76	5.56	0.20	5.1	400	540	900	1200	50	23
GTRP-6P40		40	19	483	6.07	5.87	0.20	5.1	400	540	900	1200	50	23
GTRP-6P10		10	19	483	6.36	6.16	0.20	5.1	400	540	900	1200	55	25
GTRP-6P5		5	19	483	6.41	6.21	0.20	5.1	400	540	900	1200	55	25

GTRP Installation Tools and Lanyard Assemblies

GTRP TEST PLUG				INSTALLATION TOOL				LANYARD / FLANGE ASSEMBLY					
SALES NUMBER	PIPE SIZE	PIPE SCH		SALES NUMBER	OVERALL LENGTH			HEX	SALES NUMBER	FLANGE CLASS	PRESSURE RATING		INST.
					in	mm		in			PSIG	BARG	THREADED
GTRP-15P160	1 1/2	160		GTRP-INST-050-13	19.4	494		3/4	GTRP-LA13-15-150 GTRP-LA13-15-300 GTRP-LA13-15-600	150 300 600	450 1125 2250	31 78 155	#10-32
GTRP-15P80		80											
GTRP-15P40		40											
GTRP-15P10		10											
GTRP-15P5		5											
GTRP-2PXXS	2	XXS	GTRP-INST-050-13	19.4	494	3/4	GTRP-LA13-2-150 GTRP-LA13-2-300 GTRP-LA13-2-600	150 300 600	450 1125 2250	31 78 155			
GTRP-2P160		160	GTRP-INST-063-13	19.4	494	15/16							
GTRP-2P80		80											
GTRP-2P40		40											
GTRP-2P10		10											
GTRP-2P5	5												
GTRP-25PXXS	2 1/2	XXS	GTRP-INST-050-13	19.4	494	3/4	GTRP-LA13-25-150 GTRP-LA13-25-300 GTRP-LA13-25-600	150 300 600	450 1125 2250	31 78 155			
GTRP-25P160		160	GTRP-INST-063-13	19.4	494	15/16							
GTRP-25P80		80											
GTRP-25P40		40											
GTRP-25P10		10											
GTRP-25P5		5											



GTRP-INST-YYY-13

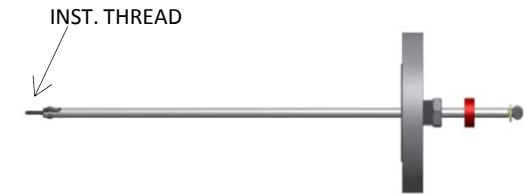


GTRP-LA13-YY-ZZZ

GTRP TEST PLUG				INSTALLATION TOOL				LANYARD / FLANGE ASSEMBLY					
SALES NUMBER	PIPE SIZE	PIPE SCH		SALES NUMBER	OVERALL LENGTH			HEX	SALES NUMBER	FLANGE CLASS	PRESSURE RATING		INST. THREAD
					in	mm		in			PSIG	BARG	THREA
GTRP-3PXXS	3	XXS		GTRP-INST-063-13	19.4	494		15/16	CONTACT EST GROUP FOR AVAILABILITY				
GTRP-3P160		160											
GTRP-3P80		80											
GTRP-3P40		40											
GTRP-3P10		10											
GTRP-3P5		5											
GTRP-4PXXS	4	XXS		GTRP-INST-125-13	20.3	514		1 1/4	GTRP-LA13-3-150 GTRP-LA13-3-300 GTRP-LA13-3-600	150 300 600	450 1125 2250	31 78 155	1/4 - 28
GTRP-4P160		160											
GTRP-4P120		120											
GTRP-4P80		80											
GTRP-4P40		40											
GTRP-4P10		10											
GTRP-4P5	5												
GTRP-6PXXS	6	XXS	GTRP-INST-200-13	20.3	514	2 1/4	GTRP-LA13-4-150 GTRP-LA13-4-300 GTRP-LA13-4-600	150 300 600	450 1125 2250	31 78 155			
GTRP-6P160		160											
GTRP-6P120		120											
GTRP-6P80		80											
GTRP-6P40		40											
GTRP-6P10		10											
GTRP-6P5	5												

EXAMPLE: A GTRP2P40 being used to test a 300 lb. class flange would require one (1) GTRP-INST-063-13 installation tool and is compatible with (1) GTRP-LA13-2-300 lanyard assembly. Use of a Lanyard / Flange Assembly is not required, but is strongly recommended.

GripTight® Reverse Pressure 8" – 12" Test Plug Specifications

GTRP Specifications		
Downstream / Test Maximum Pressure	2250 PSIG	(155 BARG)
Upstream Maximum Pressure	0 PSIG	(0 BARG)
Operational Temperature Range	-10°F thru 180°F	(-23°C thru 82°C)
Pipe Size Range	8" thru 12" – Various Schedules	
Standard Seal Material	Urethane	
Standard Plug Material	Aluminum and Zinc Plated Steel	
Required Pipe ID Condition	No Sediment, Scale, Pitting, or Corrosion.	
Compatible Test Media	Water, Air, Glycol (Low Temperature Applications)	
Compliance with Industry Standard Testing	ASME B16.5, ASME B31.1, ASME B31.3, and ASME PCC-2	

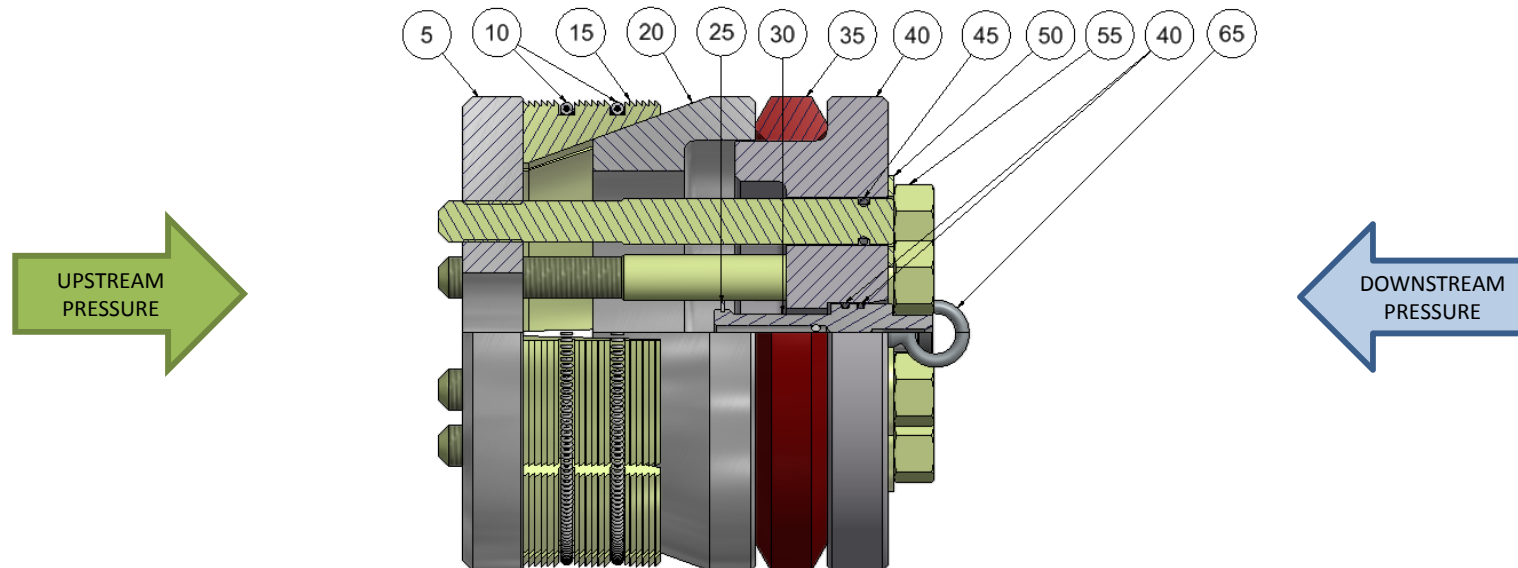


FAR SUPPORT	SPRING	GRIPPER	CONE	E-CLIP	PRESSURE PLUG	SEAL	NEAR SUPPORT	SHAFT O-RING	WASHER	SHAFT	O-RING	HOIST RING
5	10	15	20	25	30	35	40	45	50	55	60	65

GTRP Test Plug

8" – 12" Technical Specifications

SALES NUMBER	PIPE SIZE	PIPE SCH	OVERALL LENGTH OF GTRP PLUG		PIPE ID - NOMINAL		PLUG OD		CLEARANCE BETWEEN SEAL AND NOMINAL PIPE ID		HEX NUT WRENCH SIZE	NORMAL INSTALLATION TORQUE		MAXIMUM INSTALLATION TORQUE		APPROXIMATE PLUG WEIGHT	
			in	mm	in	mm	in	mm	in	mm		Ft-lbs	N-m	Ft-lbs	N-m	lbs	kg
GTRP-8P80	8	80	10.5	265	7.63	194	7.38	187	0.25	6.4	11/16	85	115	140	190	40	18.1
GTRP-8P40		40/STD	10.5	265	7.98	203	7.73	196	0.25	6.4	11/16	85	115	140	190	45	20.4
GTRP-8P10		10	10.5	265	8.33	212	8.08	205	0.25	6.4	11/16	85	115	140	190	45	20.4
GTRP-10P80	10	80	11.6	295	9.56	243	9.31	236	0.25	6.4	1 5/8	125	170	225	305	70	31.8
GTRP-10P40		40/STD	11.6	295	10.02	255	9.77	248	0.25	6.4	1 5/8	125	170	225	305	70	31.8
GTRP-10P30		30	11.6	295	10.14	258	9.89	251	0.25	6.4	1 5/8	125	170	225	305	75	34.0
GTRP-12P80	12	80	12.2	309	11.38	289	11.00	279	0.38	9.7	1 5/8	125	170	225	305	100	45.4
GTRP-12P40		40/STD	12.2	309	11.94 / 12.00	303 / 305	11.62	295	0.32 / 0.38	8.1 / 9.7	1 5/8	125	170	225	305	105	47.6
GTRP-12P20		20	12.2	309	12.25	311	11.87	301	0.38	9.7	1 5/8	125	170	225	305	110	49.9

GTRP TEST PLUG				LANYARD / FLANGE ASSEMBLY				
SALES NUMBER	PIPE SIZE	PIPE SCH		SALES NUMBER	FLANGE CLASS	PRESSURE RATING		INST. THREAD
						PSIG	BARG	
GTRP-8P80	8"	80		GTRP-LA13-8-150	150	450	31	1/4 - 28
GTRP-8P40		40		GTRP-LA13-8-300	300	1125	78	
GTRP-8P10		10		GTRP-LA13-8-600	600	2250	155	
GTRP-10P80	10"	80		GTRP-LA13-10-150	150	450	31	
GTRP-10P40		40		GTRP-LA13-10-300	300	1125	78	
GTRP-10P30		30		GTRP-LA13-10-600	600	2250	155	
GTRP-12P80	12"	80		GTRP-LA13-12-150	150	450	31	
GTRP-12P40		40	GTRP-LA13-12-300	300	1125	78		
GTRP-12P20		20	GTRP-LA13-12-600	600	2250	155		

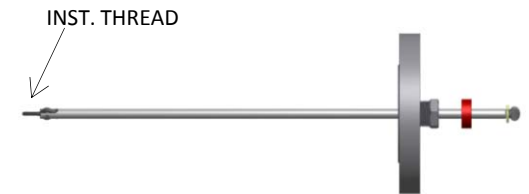

GTRP-LA13-YY-ZZZ

GripTight® Reverse Pressure Technical References

DC2542 – EST Group 3/4” and 1” GripTight Reverse Pressure Operating Procedures

DC2533 – EST Group 1-1/2” thru 6” GripTight Reverse Pressure Operating Procedures

DC2535 – EST Group 8” thru 12” GripTight Reverse Pressure Operations Procedures

DC8011 – EST Group GripTight Reverse Pressure Product Brochure

DC8077 – EST Group GripTight Reverse Pressure Fact Sheet

ASME B16.5 – Pipe Flanges and Flanged Fittings

ASME B31.1 – Power Piping

ASME B31.3 – Process Piping

ASME PCC-2 – Repair of Pressure Equipment and Piping

Ayman M. Cheta & Richard Brodzinski (2007). Comparative Study for Stresses in Nozzle and Flange Welds Generated During Conventional Pressure Testing and Local Pressure Testing Using Bolted Devices. *Journal of Pressure Vessel Technology*, Vol. 129 775-780

Questions? Contact EST Group Customer Service at any of the following locations.



EST Group

www.cw-estgroup.com

North, Central & South America

EST Group Corporate Office

2701 Township Line Road
Hatfield, PA 19440-1770 USA

P: +1.215.721.1100

+1.800.355.7044

F: +1.215.721.1101

est-info@curtisswright.com

Europe/ Middle East/ Africa

EST Group B.V.

Hoorn 312a
2404 HL Alphen aan den Rijn
The Netherlands

P: +31.172.418841

F: +31.172.418849

est-emea@curtisswright.com

China

P: +86.400.636.5077

est-china@curtisswright.cn

Singapore

P: +65.3158.5052

est-asia@curtisswright.com