


EST Group, a business unit of Curtiss-Wright Flow Control Company

2701 Township Line Road, Hatfield, PA 19440

Telephone: (215) 721-1100 • 800-355-7044 • Fax: (215) 721-1101

E-Mail: est-info@curtisswright.com • Website: estgroup.cwfc.com

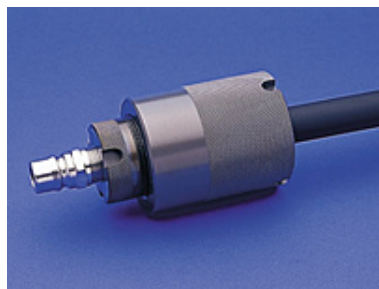

O.D. GripTight® High Pressure Test Plug

O.D. sealing test plug for high pressure hydrostatic testing of pipe, pipelines and pressure vessels.

Note: Maximum Operating Pressures have been determined by tests performed on ASTM A-106 Grade B carbon steel pipe. Actual test pressures may vary.

Specifications subject to change without notice.

Results 1 - 10 of 10

Item #	Nominal Pipe Size (in)	Minimum Pipe O.D. (in)	Maximum Pipe O.D. (in)	Minimum Pipe O.D. (mm)	Maximum Pipe O.D. (mm)	Max Operating Pressure (psi)	List Price
ODGT-025P	1/4	0.508	0.556	12.9	14.12	5000	QUOTE
ODGT-038P	3/8	0.643	0.691	16.33	17.55	5000	QUOTE
ODGT-050P	1/2	0.808	0.856	20.52	21.74	5000	QUOTE
ODGT-075P	3/4	1.018	1.066	25.86	27.08	5000	QUOTE
ODGT-100P	1	1.283	1.331	32.59	33.81	5000	QUOTE
ODGT-125P	1 1/4	1.628	1.676	41.35	42.57	5000	QUOTE
ODGT-150P	1 1/2	1.868	1.916	47.45	48.67	5000	QUOTE
ODGT-200P	2	2.343	2.406	59.51	61.11	5000	QUOTE
ODGT-250P	2 1/2	2.843	2.906	72.21	73.81	5000	QUOTE
ODGT-300P	3	3.468	3.532	88.09	89.71	3000	QUOTE

Results 1 - 10 of 10