

GripTight® Reverse Pressure Test Plug

Verify Longitudinal Strength of Flange-to-Pipe Welds

Pressure test flange-to-pipe welds with full radial, hoop and axial stresses – equivalent to the stresses that would be produced when using a blind to pressurize the entire piping system. Pressure testing can effectively verify the weld integrity providing the user confidence that the flange and weld will properly function when placed into service.

Features

- Subjects the flange-to-pipe weld to full radial, hoop and axial stresses during hydrostatic testing
- Flange-to-pipe welds can be tested without needing to pressurize the entire system
- Optional lanyard assembly acts as visual plug movement indicator allowing the operator to monitor the plug position during testing and halt work if improper installation occurred
- ASME PCC-2 Type I testing device¹

Test Pressure


- Up to 2250 PsiG (155 BarG)*

Size Range

- 2" to 48" NPS (DN50 - DN1200)*

Standard Seal Material

- Urethane**

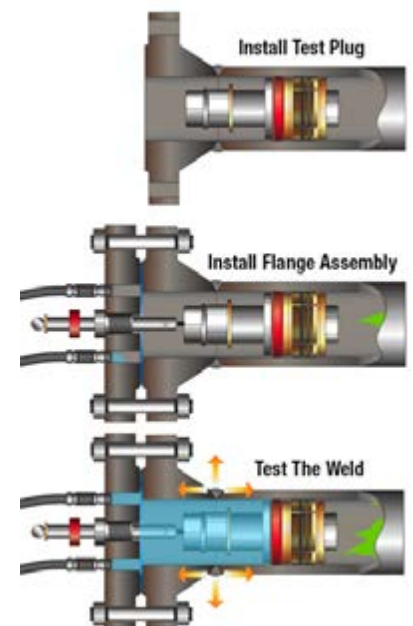

For installation and sizing information, please reference:

- [DC2534 - GripTight Reverse Pressure Plug Technical Specification](#)
- [DC2542 - Operating Procedures for ¾" - 1" GripTight Reverse Pressure Test Plugs](#)
- [DC2533 - Operating Procedures for 1½" - 6" GripTight Reverse Pressure Test Plugs](#)
- [DC2535 - Operating Procedures for 8" - 12" GripTight Reverse Pressure Test Plug](#)

* Custom sizes and pressures available upon request.

** Alternate seal materials available including Neoprene, Fluoroelastomer, Silicone, EPDM, Natural Rubber, Nitrile Buna-N, and SBR Buna-S.

1. ASME PCC-2 (Article 503) - "Test Devices for Localized Pressure or Tightness Testing of Welded Repairs"

North, Central & South America EST Group 2701 Township Line Road Hatfield, PA 19440-1770 USA | +1.215.721.1100 +1.800.355.7044 | est-info@curtisswright.com

Europe / Middle East / Africa EST Group B.V. Hoorn 312D 2404 HL Alphen aan den Rijn The Netherlands | +31.172.418841 | est-emea@curtisswright.com

China +86.400.636.5077 | est-china@curtisswright.cn | Singapore +65.3158.5052 | est-asia@curtisswright.com